

- For continuous level measurement of non-aggressive liquids (with no solid impurities) in non-pressure reservoirs, boreholes, water wells, sumps, tanks and swimming-pools
- Precise customer choice of the measurement range up to 100 m (H₂O)
- The health certificate for contact with potable water available
- Easy "plug and play" installation without any settings




Hydrostatic level meter HLM-25S is compact measuring device containing silicon strain gauge sensor and evaluation electronics in stainless steel probe. From the probe housing comes out 2-wire cable with capillary (for atmospheric pressure compensation). The front side of the sensor is equipped with plastic removable cap (to avoid membrane damage). The level meter has no customer-accessible adjusting elements.

SENSOR VARIANTS

- **HLM-25S** **Measuring range 1 ... 100 m H₂O**, arbitrary measurement ranges (customer configurable in 10 cm step). Current output (4 ... 20 mA), performance for non-explosive areas.

TECHNICAL SPECIFICATIONS		
Supply voltage		12 ... 36 V DC
Output		4 ... 20 mA
Pressure permissible overload		1.5x range
Basic error – accuracy (hysteresis, repeatability, non-linearity)		Typ. 0.5% of range Max. 0.7% of range
Long term stability		0.3% / Year
Temperature error (for 0 ... +50°C)	Range 1 ... 5 m H ₂ O	Max. 0.04% / K
	Range 5 ... 10 m H ₂ O	Max. 0.03% / K
	Range 10 ... 100 m H ₂ O	Max. 0.02% / K
Compensated temperature range		0 ... +50°C
Ambient temperature range		-20 ... +70°C
Load resistance (for U = 24 V DC)		R _{max} = 600 Ω
Ingress protection		IP68
Used materials	Probe housing	St. steel W.Nr. 1.4305 (AISI 303)
	Membrane	St. steel W.Nr. 1.4435 (AISI 316L)
	Pressure transducer cap	Plastic HDPE
	Cable sheath	Plastic PE
	Cable gland	NBR rubber
Weight	Sensor	190 g
	Cable (1 m)	60 g

DIMENSIONAL DRAWING

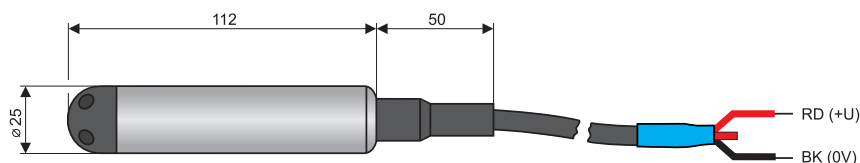

INSTALLATION

- Installation is done by hanging the probe down into the measured area (tanks, boreholes). The probe is left hanging on the cable, or is placed on the bottom. If the probe is hung **deeper than 50 m**, it is necessary to **use a cable hanger KD-60** (see picture).
- The cable includes an air **compensation tubing** (capillary), so the connection must be done in **non-hermetic junction box**.
- When winding up the cable in the bundle it must have minimum diameter of 30 cm. The cable is **not recommended** to be shortened or otherwise mechanically modified.
- In tanks where there are strong **turbulences or waves**, the probe should be placed in the stilling tube, behind the wall, or at least at the **maximum possible distance** from the source of turbulence.
- When using **other liquid than water** it is needed to make the output correction with respect to the density of the liquid, eventually **consult the application** with the manufacturer.



Cable hanger KD-60

ELECTRICAL CONNECTION

The sensor is connected to the evaluation (control, display) units through the connecting cables. Connection scheme is shown on picture. Electrical connections must be always done in voltage-free state! The power supply unit must be a source of safe voltage 12 to 36 V DC which can be a part of the evaluation or display device.



Electrical connection


Legend:

RD – Red
BK – Black

AREAS OF APPLICATIONS

For continuous level measurement of non-aggressive liquids without gross (solid) impurities in non-pressure tanks, boreholes, wells, reservoirs and swimming pools. Suitability for other than water liquids are advised to consult with the manufacturer.

ORDER CODE

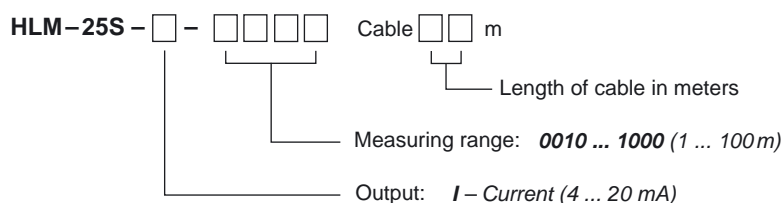

CORRECT SPECIFICATION EXAMPLES

HLM-25S-I-0010 Cable 3m

HLM-25S-I-0200 Cable 25m

HLM-25S-I-0500 Cable 52m

ACCESSORIES

Optional – for extra charge

- Cable hanger KD-60

SAFETY, PROTECTIONS AND COMPATIBILITY

The level sensor HLM-25S is equipped with a protection against reverse polarity and current overload. Electromagnetic compatibility is provided by conformity with standards EN 55011/B, EN 61326-1, EN 61000-4-2 (8 kV), -4-3 (10 V/m), -4-4 (2 kV), -4-5 (1 kV) and -4-6 (10 V).

version 03/2011